


I-MODEL WALL MOUNTED AURA 100 cm

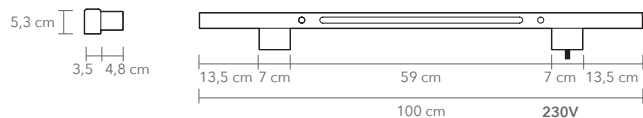

PRODUCT: I-MODEL WALL MOUNTED AURA, 100 cm

LEAD TIME: 8-10 weeks

WEIGHT: 4,2 kg (approximate value)

PACKAGE WEIGHT: 5,6 kg (approximate value)


CORD (OPTIONAL): 3m textile cord

DIMMER: External control and dimming only
dimming fixed for up/down Triac / Dali / 1-10 / PUSH DIM
dimming variable for up/down Casambi

CERTIFICATION: CE (230V)


MATERIAL: Steel, Stainless steel, Corten steel, Brass, Copper

For more technical information, please see the installation manual.

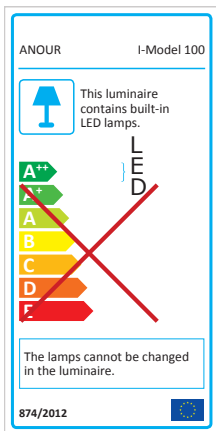


TECHNICAL DETAILS:


240V / 120V (available with Switchex)
 Illumination
 LED
 Wattage: 45 W
 Light output down: 2130 lm
 Light output up: 850 lm
 Color temperature: 2700 K, 3000 K, 4000 K
 CRI: 93+
 LED life hours: 50,000

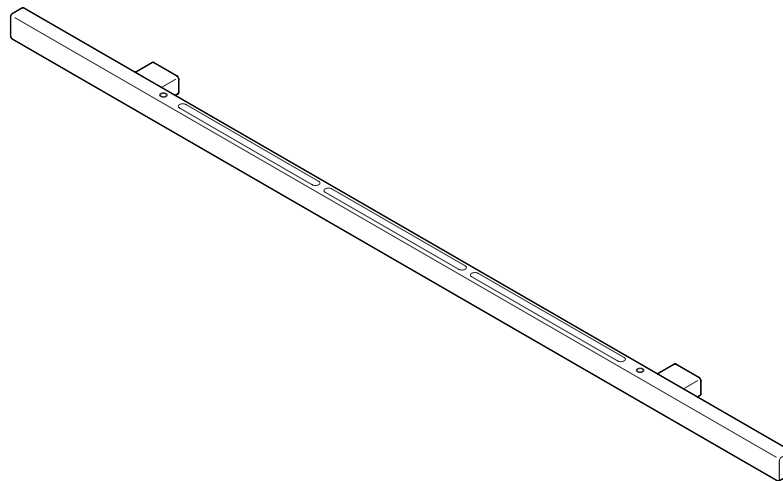


AVAILABLE MATERIALS AND FINISHES:

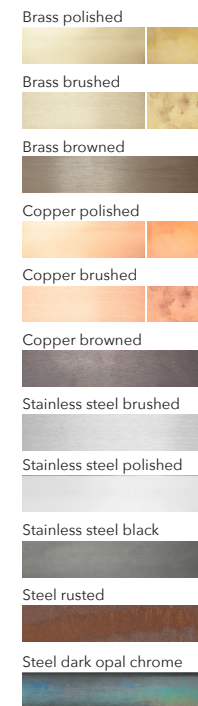

AVAILABLE CORDS (OPTIONAL):

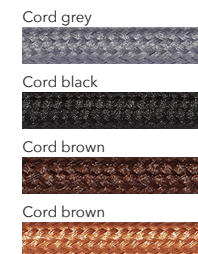

I-MODEL WALL MOUNTED AURA 150 cm

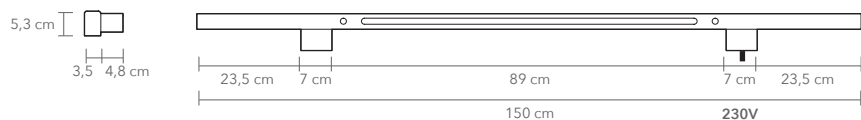

PRODUCT: I-MODEL WALL MOUNTED AURA, 150 cm

LEAD TIME: 8-10 weeks

WEIGHT: 5,4 kg (approximate value)

PACKAGE WEIGHT: 6,4 kg (approximate value)


CORD (OPTIONAL): 3m textile cord

DIMMER: External control and dimming only
dimming fixed for up/down Triac / Dali / 1-10 / PUSH DIM
dimming variable for up/down Casambi

CERTIFICATION: CE (230V)

MATERIAL: Steel, Stainless steel, Corten steel, Brass, Copper

For more technical information, please see the installation manual.

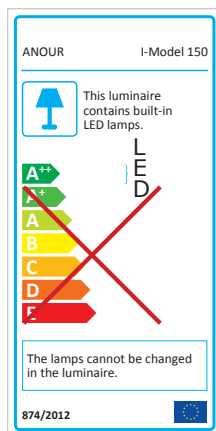

TECHNICAL DETAILS:

240V / 120V (available with Switchex)

Illumination

LED

Wattage: 60 W


Light output down: 2130 lm

Light output up: 1150 lm

Color temperature: 2700 K, 3000 K, 4000 K

CRI: 93+

LED life hours: 50,000

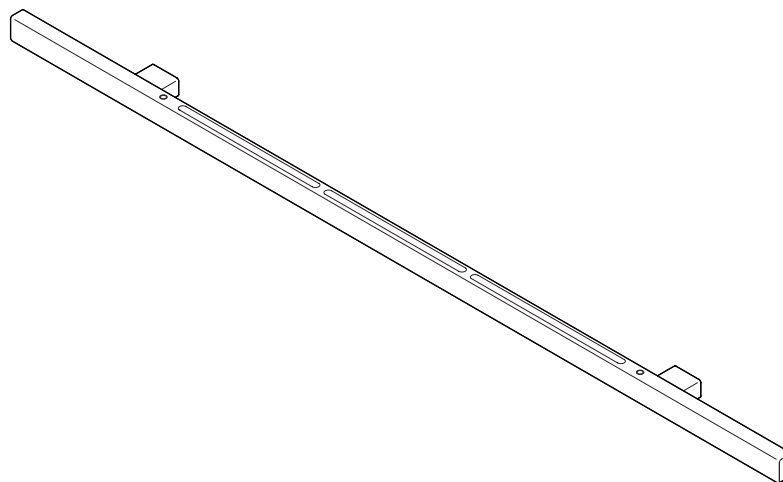

AVAILABLE MATERIALS AND FINISHES:

Brass polished



Brass brushed



Brass browned



Copper polished



Copper brushed




Copper browned



Stainless steel brushed



Stainless steel polished




Stainless steel black



Steel rusted



Steel dark opal chrome



AVAILABLE CORDS (OPTIONAL):


Cord grey



Cord black




Cord brown



Cord brown



I-MODEL WALL MOUNTED AURA 200 cm

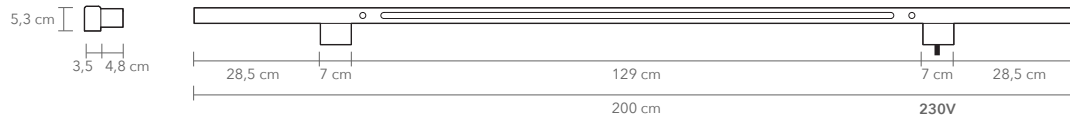

PRODUCT: I-MODEL WALL MOUNTED AURA, 200 cm

LEAD TIME: 8-10 weeks

WEIGHT: 7 kg (approximate value)

PACKAGE WEIGHT: 8,5 kg (approximate value)


CORD (OPTIONAL): 3m textile cord

DIMMER: External control and dimming only
dimming fixed for up/down Triac / Dali / 1-10 / PUSH DIM
dimming variable for up/down Casambi

CERTIFICATION: CE (230V)


MATERIAL: Steel, Stainless steel, Corten steel, Brass, Copper

For more technical information, please see the installation manual.

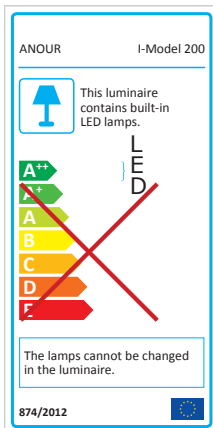

TECHNICAL DETAILS:

240V / 120V (available with Switchex)
 Illumination
 LED
 Wattage: 70 W
 Light output down: 2840 lm
 Light output up: 1450 lm
 Color temperature: 2700 K, 3000 K, 4000 K
 CRI: 93+
 LED life hours: 50,000

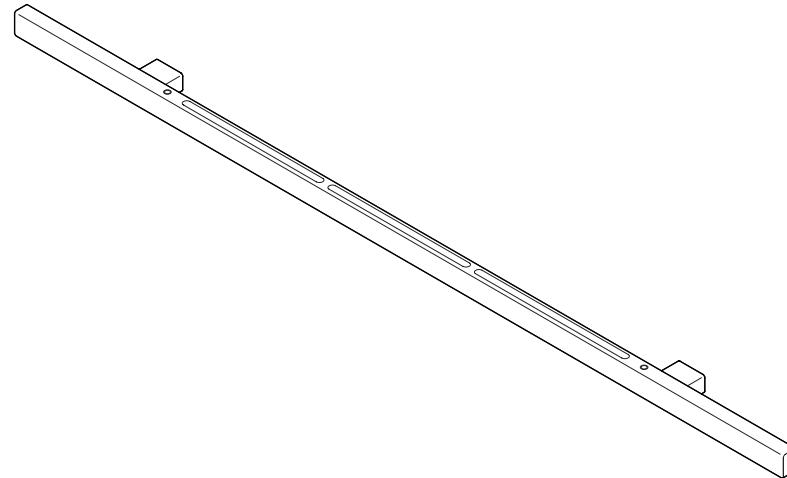


AVAILABLE MATERIALS AND FINISHES:



AVAILABLE CORDS (OPTIONAL):



I-MODEL WALL MOUNTED AURA 250 cm

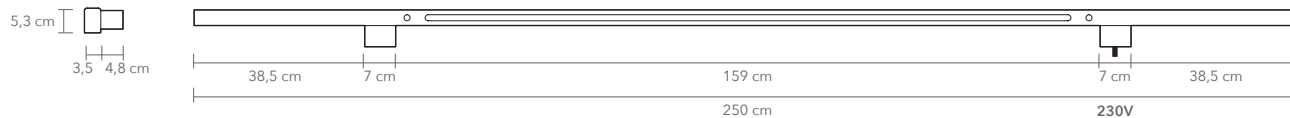

PRODUCT: I-MODEL WALL MOUNTED AURA, 250 cm

LEAD TIME: 8-10 weeks

WEIGHT: 8,7 kg (approximate value)

PACKAGE WEIGHT: 10,7 kg (approximate value)


CORD (OPTIONAL): 3m textile cord

DIMMER: External control and dimming only
dimming fixed for up/down Triac / Dali / 1-10 / PUSH DIM
dimming variable for up/down Casambi

CERTIFICATION: CE (230V)


MATERIAL: Steel, Stainless steel, Corten steel, Brass, Copper

For more technical information, please see the installation manual.

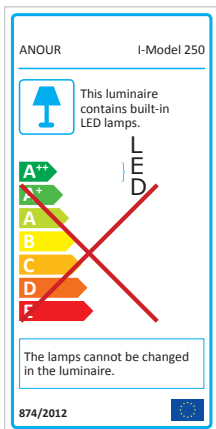


TECHNICAL DETAILS:


240V / 120V (available with Switchex)
 Illumination
 LED
 Wattage: 80 W
 Light output down: 3550 lm
 Light output up: 1750 lm
 Color temperature: 2700 K, 3000 K, 4000 K
 CRI: 93+
 LED life hours: 50,000

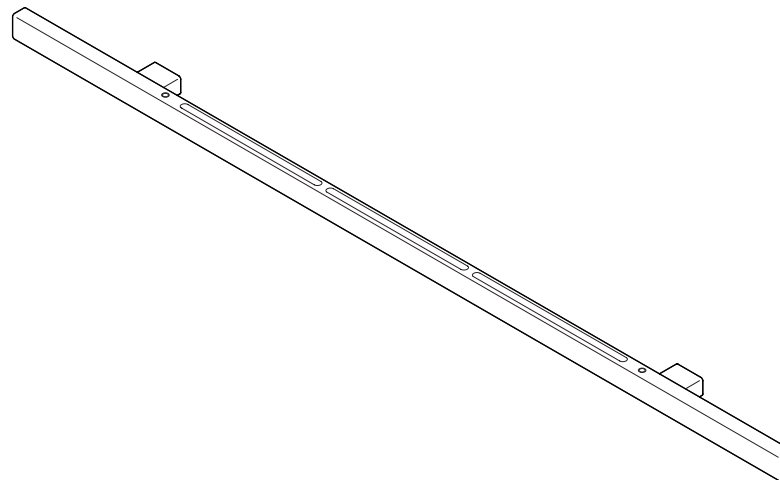


AVAILABLE MATERIALS AND FINISHES:

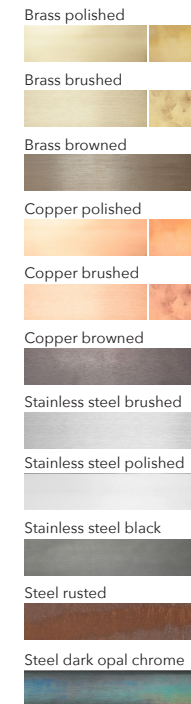

AVAILABLE CORDS (OPTIONAL):

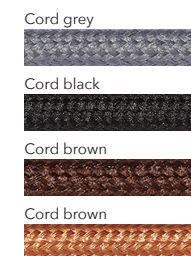

I-MODEL WALL MOUNTED AURA 300 cm

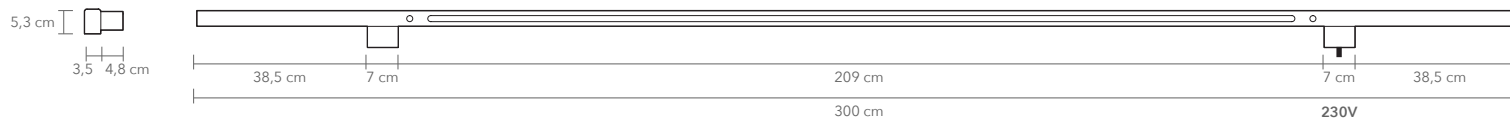

PRODUCT: I-MODEL WALL MOUNTED AURA, 300 cm

LEAD TIME: 8-10 weeks

WEIGHT: 11 kg (approximate value)

PACKAGE WEIGHT: 13 kg (approximate value)


CORD (OPTIONAL): 3m textile cord

DIMMER: External control and dimming only
dimming fixed for up/down Triac / Dali / 1-10 / PUSH DIM
dimming variable for up/down Casambi

CERTIFICATION: CE (230V)


MATERIAL: Steel, Stainless steel, Corten steel, Brass, Copper

For more technical information, please see the installation manual.

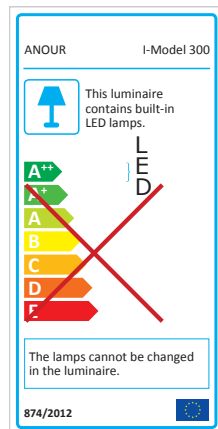


TECHNICAL DETAILS:

240V / 120V (available with Switchex)
 Illumination
 LED
 Wattage: 100 W
 Light output down: 4260 lm
 Light output up: 2130 lm
 Color temperature: 2700 K, 3000 K, 4000 K
 CRI: 93+
 LED life hours: 50,000

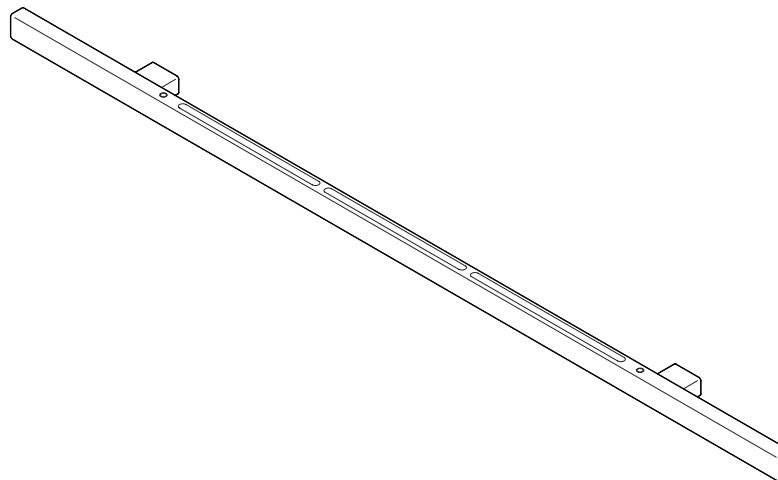

AVAILABLE MATERIALS AND FINISHES:

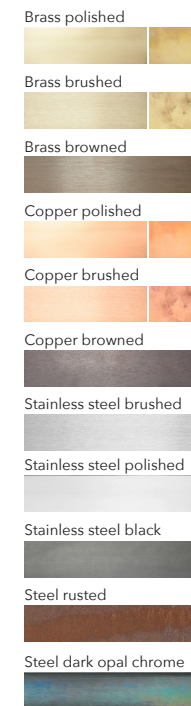

AVAILABLE CORDS (OPTIONAL):

